



# 东莞赛力科技和电路保护有限公司

Dongguan SELLI Technology and Circuits Protection Co., LTD

## 微型保险丝

### MET 慢断微型保险丝



#### 安全认证:

VDE	40mA ~ 6.3A
UL Recognized	40mA ~ 6.3A
CSA Acceptance	40mA ~ 6.3A
MITI	1A ~ 5A
KTL	40mA ~ 4A
SEMKO	40mA ~ 4A
CCC	40mA ~ 6.3A
TUV	8A ~ 10A

#### 电气特性:

额定电流	150%		210%		275%		400%		1000%	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
40mA~5A	60	2	400	10	150	3	20	150		
	min	min	ms	sec	ms	sec	ms	ms		
6.3A~10A	60	2	400	10	150	3	15	150		
	min	min	ms	sec	ms	sec	ms	ms		

#### 分断能力:

35 amperes or 10 x rated current; whichever is greater at 250V AC

#### 环境条件:

工作环境温度:

-55°C to +125°C

冲击:

MIL-STD-202, Method 213, Condition 1 (Saw tooth)

振动:

MIL-STD-202, Method 201 (10-55Hz x 3axis/no load)

盐雾实验:

MIL-STD-202, Method 101, Test Condition B (48Hrs)

绝缘电阻:

MIL-STD-202, Method 302, Test Condition A (After Opening) 10.000 ohms minimum


可焊性:

MIL-STD-202, Method 210, Test Condition F (10sec, at 260°C)

热冲击:

MIL-STD-202, Method 107, Test Condition B (-65°C to at+ 125°C)

#### 机械尺寸:

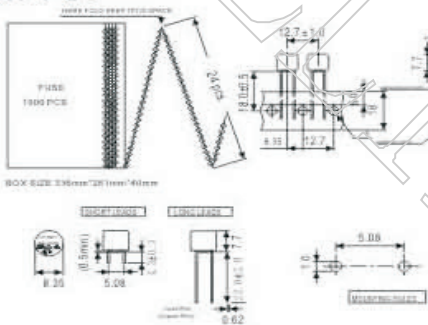


#### 材料:


Base and Cap: Black thermoplastic, UL 94-V0  
Pin: Tin-lead plated alloy

#### 包装:

1. In bulk: 1,000 pcs per box.
2. On Tap: Ammo pack, 1,000 pcs box

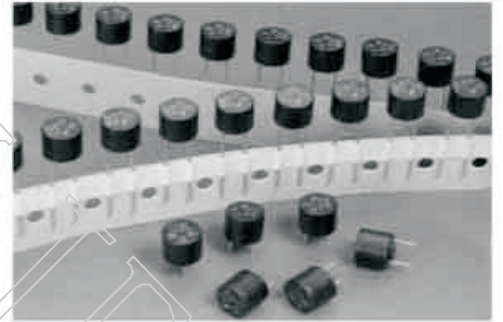

产品料号	额定电流 [In]	额定电压 (V)	公称冷电阻 (Ω)	最大电压降 (mv)	公称熔化热能 A² Sec
MET .040	40mA	250V	10.1000	600	0.016000
MET .050	50mA		6.8470	550	0.020000
MET .063	63mA		4.6550	500	0.027700
MET .080	80mA		2.8730	400	0.030000
MET .100	100mA		2.1170	350	0.040000
MET .125	125mA		1.2560	300	0.080000
MET .160	160mA		0.8230	250	0.150000
MET .200	200mA		0.5960	250	0.260000
MET .250	250mA		0.4050	220	0.470000
MET .315	315mA		0.2670	200	0.770000
MET .400	400mA	0.2000	180	1.200000	
MET .500	500mA	0.1770	170	1.950000	
MET .630	630mA	0.1270	160	3.100000	
MET .800	800mA	0.0860	150	5.100000	
MET 001	1A	0.0650	140	7.800000	
MET 1.25	1.25A	0.0500	130	12.50000	
MET 1.60	1.6A	0.0370	120	20.00000	
MET 002	2A	0.0300	100	32.00000	
MET 2.50	2.5A	0.0220	100	49.00000	
MET 3.15	3.15A	0.0170	100	78.00000	
MET 004	4A	0.0120	100	126.00000	
MET 005	5A	0.0091	100	198.50000	
MET 6.30	6.3A	0.0071	100	315.00000	
MET 008	8A	0.0043	100	652.00000	
MET 010	10A	0.0010	100	720.00000	

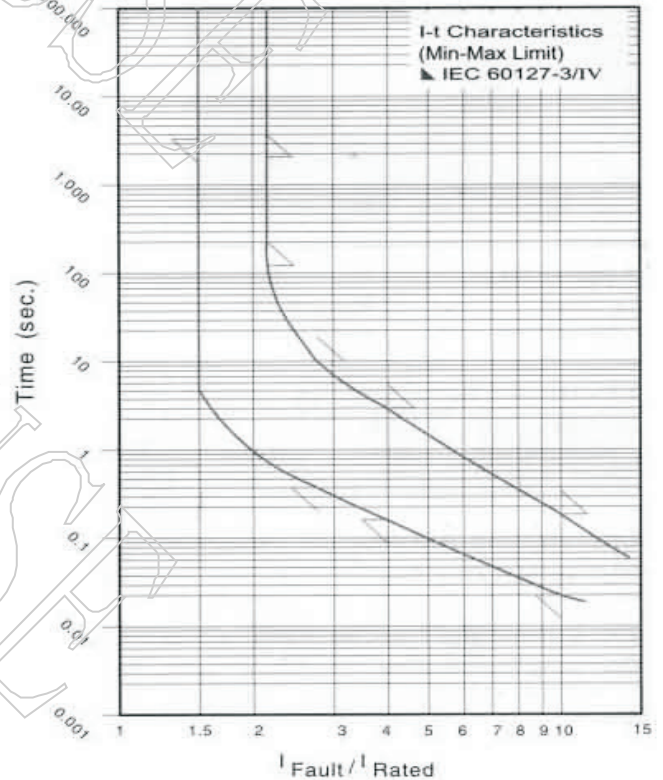

Specifications subject to change without notice

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com