



FEATURES :

- * Radial Lead Rectangular Micro Fuse
- * Time-Lag Type


APPROVALS :

- * VDE Approval [100mA - 6.3A]
- * SEMKO Approval [100mA - 6.3A]
- * Recognized under the Components Program of U.L. File No.E56092 [100mA - 6.3A]
- * Recognized under the Components Program of U.L. for Canada C-UL File No.E56092 [100mA - 6.3A]
- * CCC applicable [100mA - 6.3A]
- * Authorized by METI [1A - 4A]




2000 SERIES

DIMENSIONS :

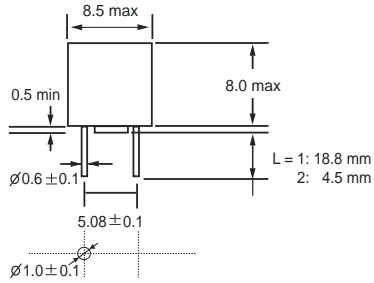

TAPING SPECIFICATIONS :

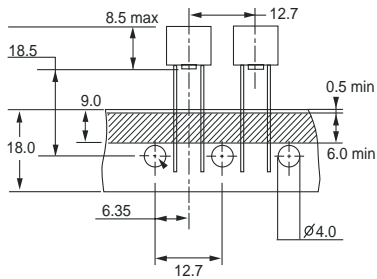

Unit : mm

ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time	
	Minimum	Maximum
210%	-	2 min
275%	400 ms	10 sec
400%	150 ms	3 sec
1000%	20 ms	150 ms

SPECIFICATIONS :

Catalog Symbol	Ampere Rating	Voltage Rating
2000	100 mA	250 V
2000	125 mA	250 V
2000	200 mA	250 V
2000	400 mA	250 V
2000	500 mA	250 V
2000	630 mA	250 V
2000	800 mA	250 V
2000	1 A	250 V
2000	1.25 A	250 V
2000	1.6 A	250 V
2000	2 A	250 V
2000	2.5 A	250 V
2000	3.15 A	250 V
2000	4 A	250 V
2000	5 A	250 V
2000	6.3 A	250 V

IEC Breaking Capacity : 35A or 10In whichever is greater.