

贴片保险丝

SEF
快断贴片保险丝



安全认证:

UL Recognized 62mA~15A
CSA Listed 62mA~10A
CSA Acceptance 10.1A~15A

电气特性:

| 额定电流 | 100% | 200% |
|----------|-------|--------|
| | MIN | MAX |
| 62mA~10A | 4 Hrs | 5 Sec |
| 12A~15A | 4 Hrs | 60 Sec |

分断能力:

62mA-8A 50 amperes at 125V AC/DC
300 amperes at 32V DC
10A: 35 amperes at 125V AC
50 amperes at 125V DC
12A-15A: 300 amperes at 32V DC
50 amperes at 65V AC/DC
300 amperes at 24V DC

环境条件:

工作环境温度:

-55°C to +125°C

冲击:

MIL-STD-202, Method 213, Test Condition 1
(100G's peak for 6 milliseconds)

振动:

MIL-STD-202, Method 201 (10-55Hz, 0.06inch, total excursion)

盐雾实验:

MIL-STD-202, Method 101, Test Condition B (48Hrs)

绝缘电阻:

MIL-STD-202, Method 302, Test Condition A (After Opening) 10,000 ohms minimum


可燃性:

MIL-STD-202, Method 210, Test Condition F (20sec, at 260°C)

热冲击:

MIL-STD-202, Method 107, Test Condition B (-65°C to +125°C)

机械尺寸:

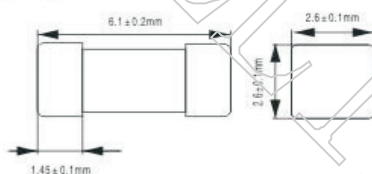


材料:


Body: Ceramic
Terminations: Silver Plated Brass Caps

包装:

1,000 Fuses in 7 inches dia. Reel, or 5,000 fuses in 13 Inches dia. reel, 12mm wide tape, per EIA Standard 481

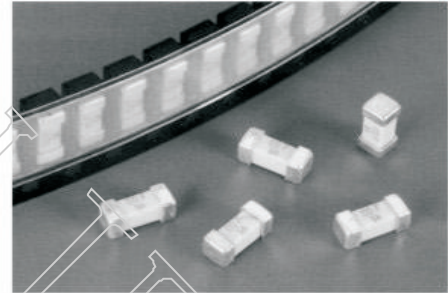

| 产品料号 | 额定电流 [In] | 额定电压 (V) | 公称冷电阻 (Ω) | 最大电压降 (mv) | 公称熔化热能 A ² Sec |
|----------|-------------|----------|-----------|------------|---------------------------|
| SEF .062 | 62mA(1/16A) | 125V | 6.6840 | 1000.00 | 0.000961 |
| SEF .080 | 80mA | | 8.0000 | 900.00 | 0.001000 |
| SEF .100 | 100mA | | 2.5000 | 900.00 | 0.001500 |
| SEF .125 | 125mA | | 1.8390 | 800.00 | 0.003120 |
| SEF .200 | 200mA | | 0.4200 | 600.00 | 0.008000 |
| SEF .250 | 250mA | | 0.3850 | 500.00 | 0.009380 |
| SEF .300 | 300mA | | 0.3300 | 450.00 | 0.018000 |
| SEF .375 | 375mA | | 0.2510 | 400.00 | 0.021100 |
| SEF .400 | 400mA | | 0.2250 | 350.00 | 0.032000 |
| SEF .500 | 500mA | | 0.1630 | 300.00 | 0.037500 |
| SEF .700 | 700mA | | 0.1300 | 280.00 | 0.120500 |
| SEF .750 | 750mA | | 0.1020 | 270.00 | 0.153100 |
| SEF 001 | 1 A | | 0.0730 | 250.00 | 0.385000 |
| SEF 1.50 | 1.5A | | 0.0430 | 220.00 | 0.725000 |
| SEF 002 | 2A | | 0.0310 | 200.00 | 0.894000 |
| SEF 2.50 | 2.5A | 0.0240 | 180.00 | 1.182000 | |
| SEF 003 | 3A | 0.0210 | 160.00 | 1.475000 | |
| SEF 3.50 | 3.5A | 0.0180 | 150.00 | 2.055000 | |
| SEF 004 | 4A | 0.0160 | 150.00 | 3.882000 | |
| SEF 005 | 5A | 0.0130 | 130.00 | 5.480000 | |
| SEF 006 | 6A | 0.0110 | 120.00 | 8.520000 | |
| SEF 007 | 7A | 0.0082 | 120.00 | 9.931000 | |
| SEF 008 | 8A | 0.0058 | 110.00 | 18.82000 | |
| SEF 010 | 10A | 0.0049 | 90.000 | 22.50000 | |
| SEF 012 | 12A | 0.0031 | 80.000 | 43.20000 | |
| SEF 015 | 15A | 0.0020 | 70.000 | 112.5000 | |

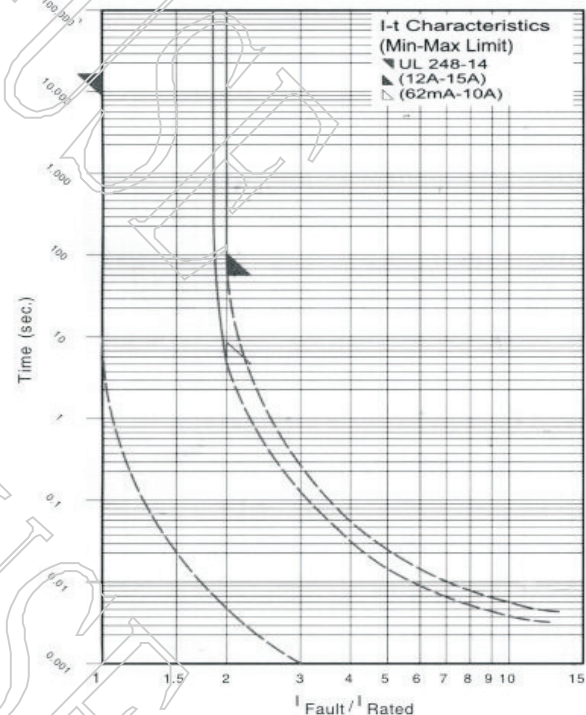

Contact information:

HongKong Selittel Electronic Co., Limited

Address: Jinyinling industrial park, Hengkeng, Liaobu town, Dongguan city, Guangdong Province

TEL: 086-769-83218762, 22498696, 23067981, 22387758

WEBSITE: <http://www.sellfuse.com>