


贴片保险丝

SET(U) 慢断贴片保险丝



安全认证:

UL Recognized	200mA~5A
CSA Listed	200mA~5A
VDE	200mA~5A
MITI	1A~5A

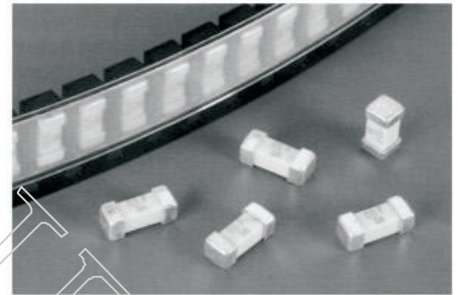

电气特性:

额定电流	125%		200%		1000%	
	MIN	MIN	MAX	MIN	MAX	
200mA - 5A	1 Hrs	1 Sec	120 Sec	10mS	100mS	

分断能力

50 amperes or 10 x rated current; whichever is greater at 125V AC/DC

环境条件:

工作环境温度:

-55°C to +125°C

冲击:

MIL-STD-202, Method 213, Test Condition 1 (100G's peak for 6 milliseconds)

振动:

MIL-STD-202, Method 201 (10-55Hz, 0.06inch, total excursion)

盐雾实验:

MIL-STD-202, Method 101, Test Condition B (48Hrs)

绝缘电阻:

MIL-STD-202, Method 302, Test Condition A (After Opening) 10.000 ohms minimum


可焊性:

MIL-STD-202, Method 210, Test Condition F (20sec, at 260°C)

热冲击:

MIL-STD-202, Method 107, Test Condition B (-65°C to +125°C)

机械尺寸:

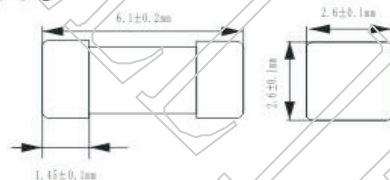


材料:

Body: Ceramic
Terminations: Silver Plated Brass Caps

包装:

1,000 Fuses in 7 inches dia. White color reel, or 5,000 fuses in 13 inches dia. White color reel, 12mm wide tape, per EIA Standard 481.

产品料号	额定电流 (In)	额定电压 (V)	公称冷电阻 (Ω)	最大电压降 (mv)	公称熔化热能 A ² Sec
SET(U).200	200 mA	125V	2.305	900	0.0865
SET(U).250	250 mA		1.420	750	0.1320
SET(U).315	315 mA		1.052	700	0.2085
SET(U).400	400 mA		0.521	650	0.3310
SET(U).500	500 mA		0.412	550	0.5122
SET(U).630	630 mA		0.302	450	0.8055
SET(U).800	800 mA		0.245	350	1.3044
SET(U)001	1A		0.109	250	1.9090
SET(U)1.25	1.25A		0.090	240	2.8102
SET(U)1.50	1.5A		0.061	230	4.5385
SET(U)002	2A		0.043	210	8.8570
SET(U)2.50	2.5A		0.038	200	16.550
SET(U)3.15	3.15A		0.020	180	32.210
SET(U)004	4A		0.017	160	40.800
SET(U)005	5A		0.012	150	65.000

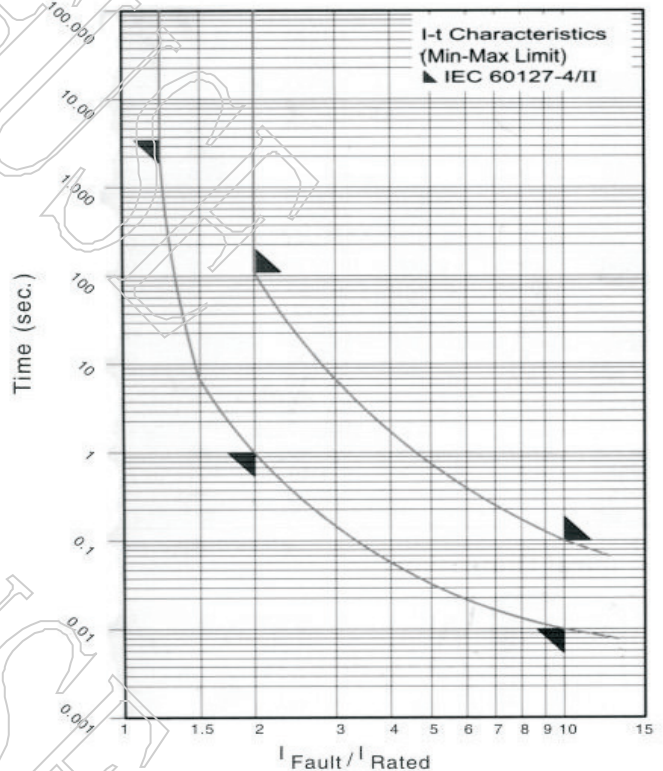

Contact information:

HongKong Selittel Electronic Co., Limited

Address: Jinyinling industrial park, Hengkeng, Liaobu town, Dongguan city, Guangdong Province

TEL: 086-769-83218762, 22498696, 23067981, 22387758

WEBSITE: <http://www.sellifuse.com>