

贴片保险丝

SET 慢断贴片保险丝



安全认证:

UL Recognized 200mA - 7A
CSA Listed 200mA - 7A

电气特性:

额定电流	100%		200%		300%		800%	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
200mA-7A	4 Hrs	1 Sec	60 Sec	0.2 Sec	3 Sec	0.02 Sec	0.1 Sec	

分断能力:

50 amperes at 125V AC/DC
300 amperes at 32V DC

环境条件:

工作环境温度:

-55°C to +125°C

冲击:

MIL-STD-202, Method 213, Test Condition 1
(100G' s peak for 6 milliseconds)

振动:

MIL-STD-202, Method 201 (10-55Hz, 0.06inch, total excursion)

盐雾实验:

MIL-STD-202, Method 101, Test Condition B (48Hrs)

绝缘电阻:

MIL-STD-202, Method 302, Test Condition A (After Opening) 10,000 ohms minimum


可焊性:

MIL-STD-202, Method 210, Test Condition F (20sec, at 260°C)

热冲击:

MIL-STD-202, Method 107, Test Condition B (-65°C to +125°C)

机械尺寸:

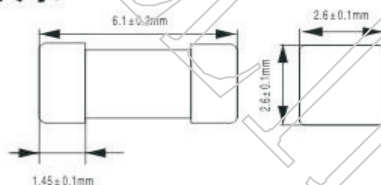


材料:


Body: Ceramic
Terminations: Silver Plated Brass Caps

包装:

1,000 Fuses in 7 inches dia. Reel, or 5,000 fuses in 13 Inches dia. reel, 12mm wide tape, per EIA Standard 481

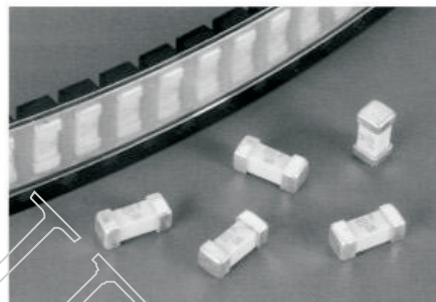

产品料号	额定电流 [In]	额定电压 (V)	公称冷电阻 (Ω)	最大电压降 (mv)	公称熔化热能 A ² Sec
SET .200	200mA	125V	2.501	750	0.06000
SET .250	250mA		1.564	700	0.0680
SET .300	300mA		1.352	600	0.0900
SET .350	350mA		0.977	550	0.1000
SET .375	375mA		0.683	500	0.2109
SET .400	400mA		0.550	450	0.2400
SET .450	450mA		0.495	450	0.3037
SET .500	500mA		0.451	400	0.3750
SET .700	700mA		0.210	360	0.4900
SET .750	750mA		0.242	320	0.6260
SET 001	1A		0.132	250	1.9090
SET 1.50	1.5A		0.067	230	3.8350
SET 002	2A		0.043	210	8.5600
SET 2.50	2.5A		0.040	200	16.550
SET 003	3A		0.033	190	22.540
SET 3.50	3.5A		0.024	180	29.400
SET 004	4A		0.022	160	35.820
SET 005	5A	0.021	150	54.800	
SET 006	6A	0.018	140	64.800	
SET 007	7A	0.011	130	89.830	

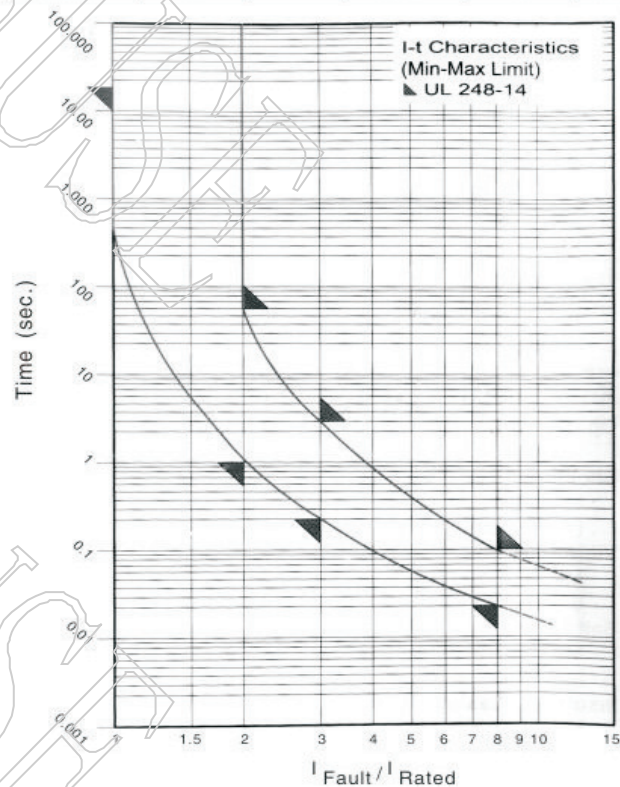

Contact information:

HongKong Selittel Electronic Co., Limited

Address: Jinyinling industrial park, Hengkeng, Liaobu town, Dongguan city, Guangdong Province

TEL: 086-769-83218762, 22498696, 23067981, 22387758