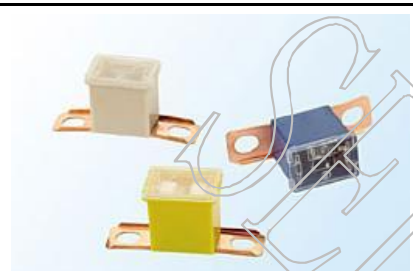
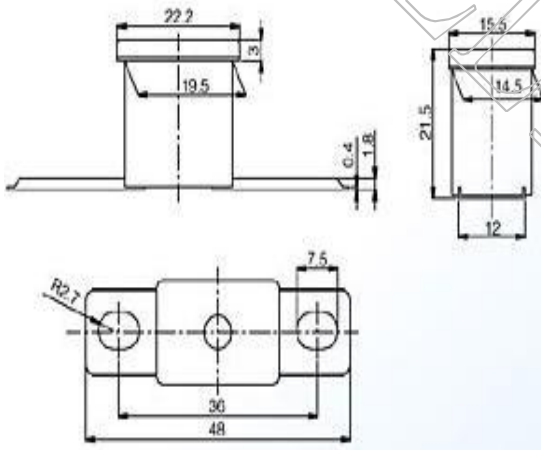

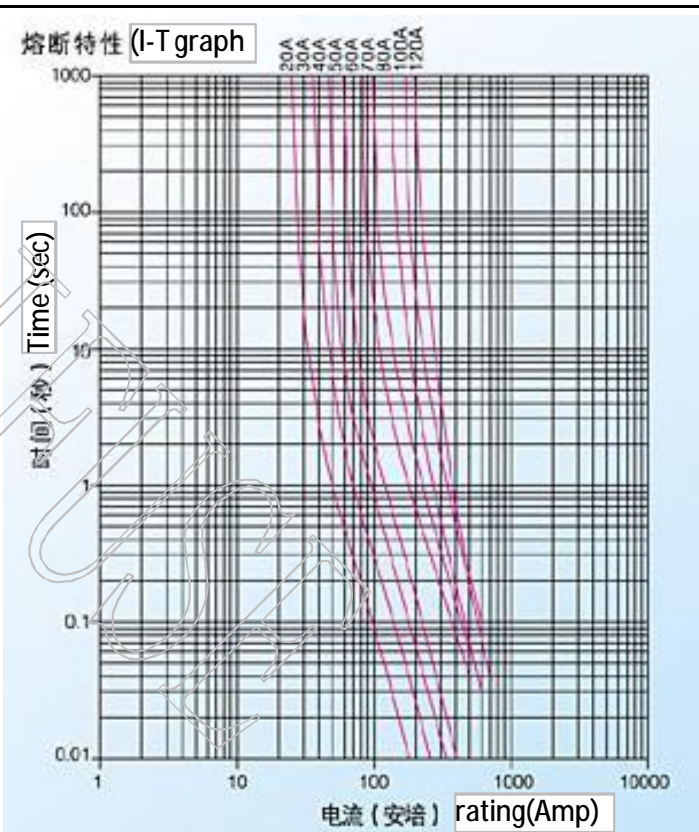


MODEL型号: FLB-S				Spec. 规格	22x15.5x48xD5.4mm 20A-120A32V Square fuse	
Time-Current Characteristic(熔断特性): Time-Lag type				Standard(标准): JASO D614 QC/T420-2004		
				Functional Characteristics 电气特性		
				Blow time limit 熔断时间		
				Testing current 测试电流	Mix 最小	Max 最大
				110%	4Hrs	—
				200%	5sec	100sec
350%		0.2sec	7sec			
600%		0.04sec	1sec			
根据使用状况, 熔断特性可能改变						
				Safety Approvals 安全认证		
						
				Rohs compliance		
				Materials 材料		
				1. Case ----- PA66+GF 2. Fuse ----- Copper Alloy 3. Cap----- PC 4. Chassis----- Ceramic		
Operating Temperature(工作温度)				-40°C to +85°C (consider de-rating)		
Stock Conditions(储存条件)				+10°C to +60°C; Relative humidity ≤ 75% yearly average; Without dew, maximum value for 30 days-95%		
Reference information/参考信息						
Ampere rating 额定电流	Voltage rating 额定电压	COLOR 胶壳颜色	P/N 零件编号			
20A	≤ 32V	Light blue/浅蓝	FLB-S 20			
30A		Pink/粉红	FLB-S 30			
40A		Green/绿	FLB-S 40			
50A		Red/红	FLB-S 50			
60A		Yellow/黄	FLB-S 60			
70A		Brown/褐	FLB-S 70			
80A		Black/黑	FLB-S 80			
100A		Blue/蓝	FLB-S 100			
120A		white/白	FLB-S 120			

Specifications subject to change without notice

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com