
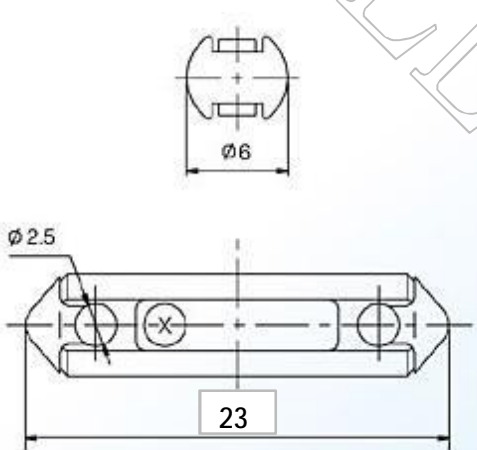

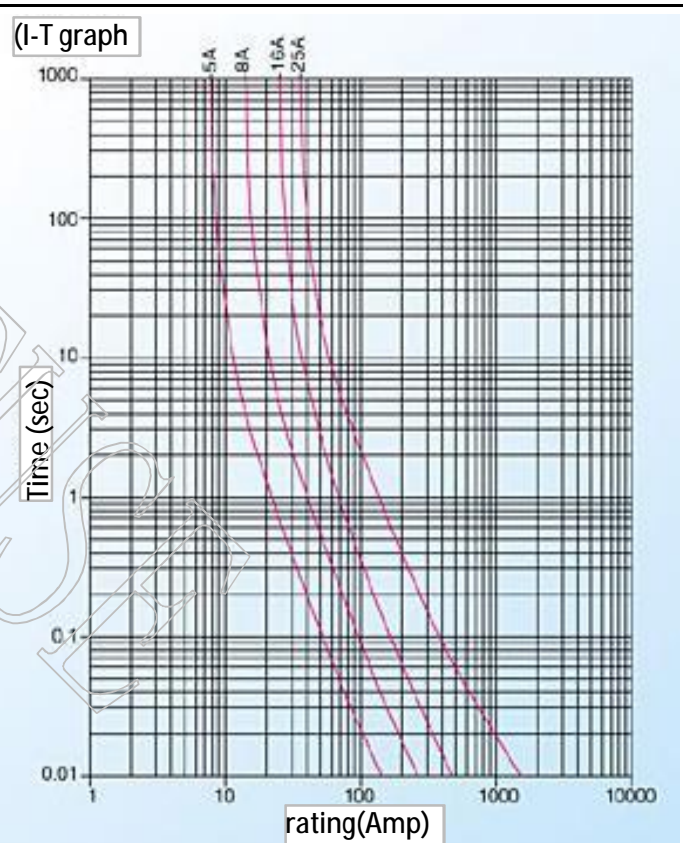


MODEL型号: GBC-B		Spec. 规格: 23xD6mm 5A-30A32V europe fuse		
Time-Current Characteristic(熔断特性): Time-Lag type		Standard(标准): DIN72581		
		Functional Characteristics 电气特性		
		Testing current 测试电流	Blow time limit 熔断时间	
			Mix 最小	Max 最大
		150%	1Hrs (小时)	— / —
		250%	— / —	60sec (秒)
		可接受客户指定改用陶瓷材料/PPS 根据使用状况，熔断特性可能改变		
		Safety Approvals 安全认证		
				
		Rohs compliance		
		Materials 材料		
		1. chassis ----- bakelite 电木 2. Fuse ----- Zn Alloy 锌合金		
		Operating Temperature(工作温度)		
		-40°C to +85°C (consider de-rating)		
		Stock Conditions(储存条件)		
		+10°C to +60°C; Relative humidity ≤ 75% yearly average; Without dew, maximum value for 30 days-95%		
Reference information/参考信息				
Ampere rating 额定电流	Voltage rating 额定电压	COLOR 壳颜色	P/N 零件编号	
5A	≤ 32V	Yellow/黄	GBC-B 5	
8A		white/白	GBC-B 8	
16A		red/红	GBC-B 16	
25A		blue/蓝	GBC-B 25	
20A		Yellow/黄	GBC-B 20	
30A		Green/绿	GBC-B 30	



Specifications subject to change without notice