




赛力


东莞赛力科技和电路保护有限公司

DONGGUAN SELLI TECHNOLOGY AND CIRCUITS PROTECTION CO., LTD

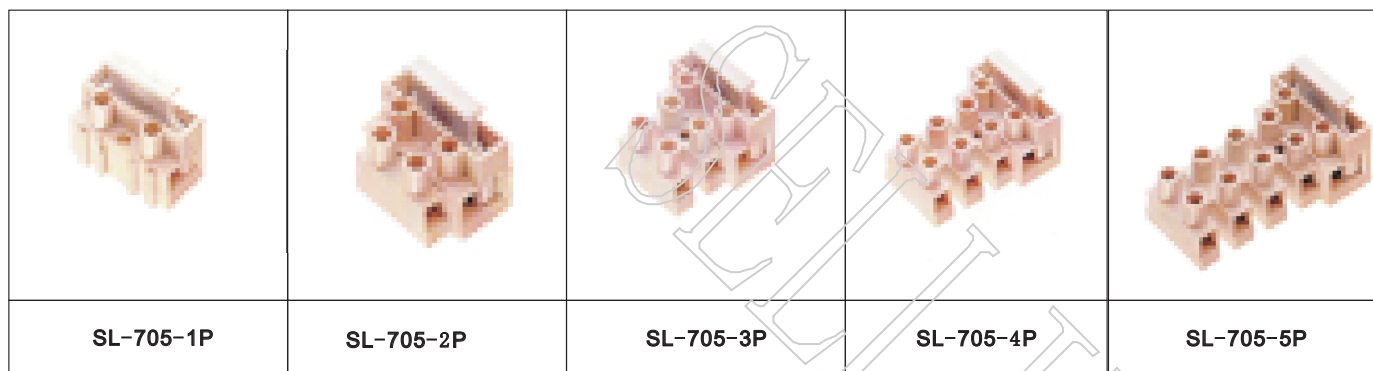


#Specification Guide Codes:

Current Rating: Fuse holder 13A , Terminal 13A
 Voltage Rating: Fuse holder 250VAC, Terminal 450VAC
 Working Temp. : Temperature 125°C (Short period 170°C)
 Material: Polymide 66 UL94-V0 Flame retardent
 Terminal: Brass nickel plated
 Screws: M3x0.75 zinc Plated
 Wire: UP TO 4mm Wire Acceptance

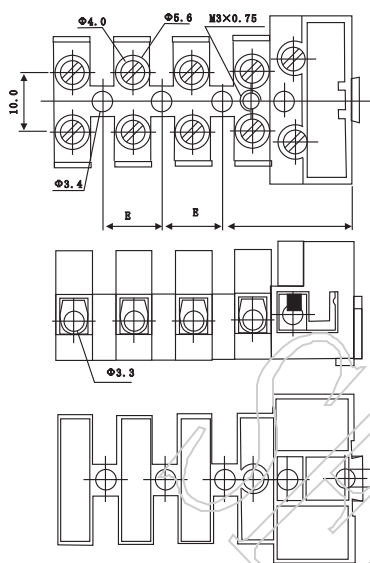

Specification

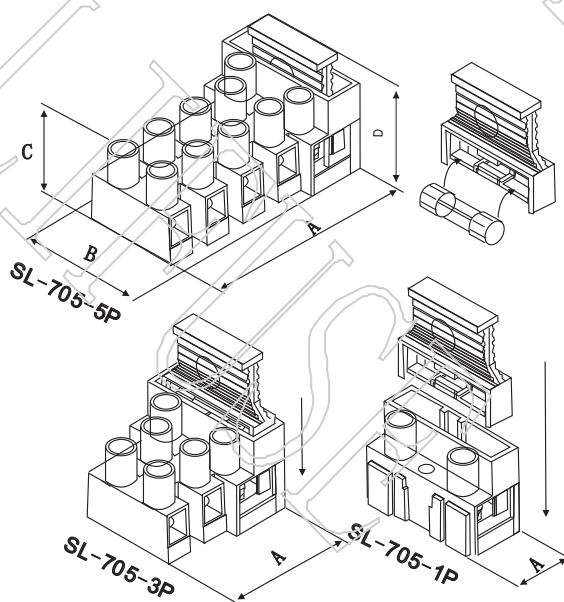

TECHNICAL DATA

| RATING (TERMINAL BLOCK) | RATING (FUSES HOLDER) | DISSIPATED POWER | FUSE SIZE |
|--------------------------------|---------------------------------|------------------|-----------|
| 2.5mm ² 10A 380V | 2.5mm ² 6.3A 250V | 3W | 5×20mm |

DIMENSIONS

| MSTK ITEN NO | A | B | C | D | E | G | L |
|---------------------|------|----|----|------|------------|----|-----------|
| SL-705-1P 1POLES | 16 | 28 | 20 | 27.5 | 10 ±0.2 | 20 | 3 ±0.2 |
| SL-705-2P 2POLES | 20.5 | 28 | 20 | 27.5 | 10 ±0.2 | 20 | 3 ±0.2 |
| SL-705-3P 3POLES | 30.5 | 28 | 20 | 27.5 | 10 ±0.2 | 20 | 3 ±0.2 |
| SL-705-4P 4POLES | 40.5 | 28 | 20 | 27.5 | 10 ±0.2 | 20 | 3 ±0.2 |
| SL-705-5P 5POLES | 50.5 | 28 | 20 | 27.5 | 10 ±0.2 | 20 | 3 ±0.2 |

Specifications subject to change without notice

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com