
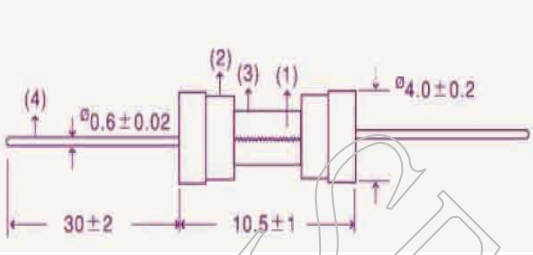



Fuse Detail Specification

MODEL 型号: ICP			Spec. 规格	φ3.6x10mm/T250mA-6.3A250V/Ceramic Tube with pigtail		
Time-Current Characteristic(熔断特性): Time-Lag type			Standard(标准): IEC60127-2			
			Functional Characteristics 电气特性			
			Testing current 测试电流	Blow time limit 熔断时间		
				Mix 最小	Max 最大	
			210%	—		60sec
			275%	400ms	10s	
400%	150ms	3s				
1000%	20mS	150ms				
			Safety Approvals 安全认证			
						
			UL Listed: 250mA-6.3A CSA certified: 250mA-6.3A Rohs compliance			
			Materials 材料			
Reference information			1. Wire ----- Alloy 2. End cap ----- brass with nickel plated 3. Fuse body ----- Ceramic tube 4. Lead ----- tin plated copper wire on nickel plated brass cap			
Ampere rating	Voltage rating	Nominal Melting I ² t A ² Sec	PS: Above nominal melting values are for your reference only. For more information, please don't hesitate to contact the salesperson.			
250mA	250V	0.315				
315mA		0.47				
400mA		0.94				
500mA		1.33				
630mA		1.43				
800mA		3.86				
1A		6.93				
1.25A		11.7				
1.6A		18.1				
2A		25.1				
2.5A		24				
3.15A		41.1				
4A		99.7				
5A	173					
6.3A	173					
			Operating Temperature(工作温度)			
			-40°C to +85°C (consider de-rating)			
			Stock Conditions(储存条件)			
			+10°C to +60°C; Relative humidity ≤75% yearly average; Without dew, maximum value for 30 days-95%			
			Solderability(焊接性)			
			260°C, ≤3s(wave); 350°C, ≤1S(soldering iron)			
			Marking(印字)			
			Approval logo's where appropriate, current rating, voltage rating are stamped on the fuse end caps			
			Packing(包装)			
			Bulk pack of 5000pcs per box(200 per plastic bag) for 3.6x10mm fuse			
			Bulk pack of 5000pcs per box (1000 per plastic bag) for 5.2x20mm fuse			
			Bulk pack of 2000pcs per box (500 per plastic bag) for 6x30mm fuse			
			Mechanical strength(机械强度)			
			Body tensile strength: ≥3kg; lead tensile strength: ≥0.7kg			
			Torsional strength: ≥500g.cm			
			Temperature character(温升)			
			When 100% of rating the temperature rise doesn't exceed 75°C			
			Breaking capacity(熔断能力)			
		35A or 10In	250V	AC		

Specifications subject to change without notice

Dongguan Selli Technology and Circuits Protection Co, LTD

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com